

GOVERNMENT OF NATIONAL CAPITAL TERRITORY OF DELHI
HEADQUARTERS: DELHI FIRE SERVICE, CONNAUGHT PLACE
NEW DELHI- 110001


No. F.6/DFS/MS/GH/2026/SZ/84

Dated: 28/01/2026

FIRE SAFETY CERTIFICATE

Certified that the Rishi guest house located at 76-76A, (Municipal No. 7764-7765), Ram Nagar, Pahar Ganj, New Delhi- 110055, comprised of ground plus four upper floors, using ground floor (reception & 04 guest rooms), 1st to 3rd floor (08 guest rooms at each floor) and 4th floor not in use (affidavit submitted) (total 28 guest rooms only). The FSC was earlier granted by this department vide letter No. F.6/DFS/MS/GH/2022/01 dated 02.01.2023. The premises was re-inspected by the officer concerned of this department on dated 20.01.2026 in the presence of Sh. Rajesh Arora, and found that the guest house have deemed complied with the fire prevention and fire safety requirements in accordance with Rule 33 of the Delhi fire service Rules 2010 and that the building/premises is fit for occupancy class "Residential" (Sub division- A-1) ground + 4 upper floors, using ground floor (reception & 04 guest rooms), 1st to 3rd floor (08 guest rooms at each floor and 4th floor not in use (affidavit dated 21.01.2026 submitted) (28 guest rooms up-to 3rd floor) w.e.f. 28/01/2026 for a period of three years in accordance with Rule 36 unless renewed under Rule 37 or sooner cancelled under Rule 40 and subject to compliance of the conditions under Rule- 38 of the Delhi Fire Service Rules, 2010 printed below.

Issued on 28/01/2026 at New Delhi.


 (Dr. S.K. Tomer)
 Dy. Chief Fire Officer
 New Delhi Zone

Copy to: -

The Commissioner, MCD, Delhi: with a request to ensure the occupancy as detailed above and deviation, if any.
 (Online application Id 2025122616131 dated 26.12.2025)

Conditions for the validity of fire safety certificate: -

1. All the fire safety arrangements provided therein shall be maintained in good working condition at all times.
2. The means of escape arrangements shall be kept unlocked & unobstructed for speedy evacuation of occupants in case of an emergency.
3. Any loss of life or property due to non-functional fire safety measures shall be at the risk and responsibility of the management.
4. The trained staff should be available round the clock.
5. Any deviations w.r.t. construction shall be verified by the concerned building sanctioning agency.
6. The certificate may not be treated in any case for the regularization of the unauthorized construction, if any.
7. The owner/occupier shall submit a declaration every year in the form 'K' provided in the first schedule of Delhi Fire Service Rules 2010, form is available on www.dfs.delhigovt.nic.in.
8. The owner/occupier shall apply for renewal of this Fire Safety Certificate to the Director in the Form 'J' [sub rule (1) of rule 37] along with a copy of this Certificate, six months prior to its expiry.

INSPECTION REPORT

1. Name & address of the building : M/s. Rishi guest house at 76-76A (Municipal No- 7764-65), Ram Nagar, Pahar Ganj, New Delhi- 55.
2. Building is comprised of : G+4 upper floors (28 guest rooms), ground floor (reception & 04 guest rooms), 1st to 3rd floor (08 guest rooms at each floor), 4th floor not in u (affidavit Dated 21.01.2026 Submitted by guest house management)
3. Type of Occupancy : Residential (Guest House)
4. Type of Case : Renewal
5. Details of Previous FSC letter : F.6/DFS/MS/GH/2022/01 dated 02.01.2023
6. Fire Safety direction letter No : N/A
7. Date of Inspection : 20.01.2026
8. Name of the Inspecting officers : ADO R.K. Yadav (DWK)
9. Name and designation of officer from the building side : Sh. Rajesh Arora
10. Year of construction : 1986
11. Applicant's letter No : ID No. 2025122616131 dated 26.12.2025

Old Ca


Sr. No.	Minimum Standards on Fire Prevention and Fire Safety U/R33	Requirements as per FSC dt. 02.01.2023	Provided at Site	Remarks MR/NMR
1	Access to Building.			
	<ul style="list-style-type: none"> Road width Gate width Width of internal road 	N/A N/A N/A	05 m N/A N/A	N/A N/A N/A
2	Number, Width, Type and Arrangement of Exits.			
	a. Number of Staircases			
	<ul style="list-style-type: none"> Upper floor Basement 	01 Nos. N/A	01 Nos. N/A	MR N/A
	B. Width of Staircases			
	<ul style="list-style-type: none"> Upper floor Basement 	0.80 m N/A	1.0 m N/A	MR N/A
	c. Protection of Exits			
	<ul style="list-style-type: none"> Fire check door Pressurization 	Required N/A	Provided N/A	MR N/A
	d. No. of Continuous Staircases to Terrace	01 nos.	01 nos.	MR
	e. Width of Corridor	1.20 m	1.25 m	MR
	f. Door Size	1.0 m	1.0 m	MR
3	Compartmentation.			
	<ul style="list-style-type: none"> Fire check door Sealing of electrical shafts Fire rating of shaft door Water curtain Fire dampers 	Required N/A N/A N/A N/A	Provided N/A N/A N/A N/A	MR N/A N/A N/A N/A
4	Smoke Management System.			
	<ul style="list-style-type: none"> Basement Upper floor 	N/A Required	N/A Provided	N/A MR
5.	Fire Extinguishers.			
	<ul style="list-style-type: none"> Total numbers Types ISI marking 	12 nos. ABC /CO ₂ ISI marked	Provided Provided Provided	MR MR MR

06	First-Aid-Hose Reels.			
	• Total numbers on each floor	01 No	Provided	MR
	• Length of hose reel hose	30 m	Provided	MR
	• Nozzle diameter	05 mm	Provided	MR
07	Automatic Fire Detection, CO detection and Alarming System.			
	• CO Type of detectors	Required	Provided	MR
	• Location of main panel	Required	Provided	MR
	• Location of repeater panel	N/A	N/A	N/A
	• Alternate source of power	Required	Provided	MR
	• Hooter's location	Required	Provided	MR
08	MOEFA	Required	Provided	MR
09	Public Address System.	N/A	N/A	N/A
10	Automatic Sprinkler System.			
	• Basement & Stilt	N/A	N/A	N/A
	• upper floor	N/A	N/A	N/A
	• sprinkler above false ceiling	N/A	N/A	N/A
11	Internal Hydrants			
	• size of riser/down-comer	N/A	N/A	N/A
	• Number of hydrants per floor	N/A	N/A	N/A
	• Hose box	N/A	N/A	N/A
12	Yard Hydrants.			
	• Total number of hydrants	N/A	N/A	N/A
	• Hose box	N/A	N/A	N/A
13	Pumping Arrangements.			
	➤ Ground Level			
	• Discharge of main pump	N/A	N/A	N/A
	• Head of main pump	N/A	N/A	N/A
	• Number of main pumps	N/A	N/A	N/A
	• Jockey pump out put	N/A	N/A	N/A
	• Jockey pump head	N/A	N/A	N/A
	• Standby pump out put	N/A	N/A	N/A
	• Standby pump head	N/A	N/A	N/A
	• Auto starting /manual stopping	N/A	N/A	N/A
	• Pump house access	N/A	N/A	N/A
	➤ Terrace Level			
	• Discharge of pump	450 LPM	450 LPM	MR
	• Head of the pump	40 m	40 m	MR
	• Power supply	Required	Provided	MR
	• Auto Starting of pump	Required	Provided	MR
14	Captive Water Storage for Fire Fighting.			
	• Underground tank capacity	N/A	N/A	N/A
	• Draw-off connection	N/A	N/A	N/A
	• Fire service inlet	N/A	N/A	N/A
	• Access to tank	N/A	N/A	N/A
	• Overhead Tank capacity	5,000 ltrs	5,000 ltrs	MR
15	Exit Signage.	Required	Provided	MR


Provision of Lifts.				
	• Pressurization of Lift Shaft	N/A	N/A	N/A
	• Pressurization of Lift lobby	N/A	N/A	N/A
	• Communication in lift car	N/A	N/A	N/A
	• Firemen's grounding switch	N/A	N/A	N/A
	• Lift Signage	N/A	N/A	N/A
17	Standby power supply	Required	Provided	MR
18	Refuge Area.			
	• Total area	N/A	N/A	N/A
	• Location	N/A	N/A	N/A
19	Fire Control Room			
	• Detector system panel	N/A	N/A	N/A
	• Flow switch panel	N/A	N/A	N/A
	• PA system panel	N/A	N/A	N/A
	• Battery backup	N/A	N/A	N/A
	• Building Floor Plans	N/A	N/A	N/A
20	Special Fire Protection systems for protection of special Risks, if any:	Required	ABC & Co2 fire extinguisher provided near elect. panel	MR

The fire protection systems provided in the building were tested, checked and found functional at the time of inspection.


In view of the deemed compliance of the minimum standards of fire prevention and fire safety measures as required under the rules the FSC issued vide letter No. F.6/DFS/MS/GH/2022/01 dated 02.01.2023, **renewal under rule 37** of the Delhi Fire Service Rules 2010, **is recommended.**

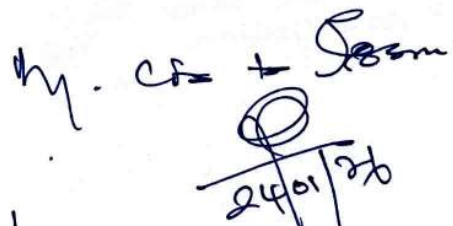

 Signature of Inspecting Officer
 Name: - R.K. Yadav
 Designation: - ADO (DWK)


 D.O. (CD)
 22/01/26


 Dy. CFO (ND2)


 D.O. (CD)
 23/1/26


 Principal Director


 Dy. CFO + Sasm.
 24/01/26


 Dy. CFO (ND2)


 D.O. (CD)
 24/1/26

ADO/DWK

P.F.O.